


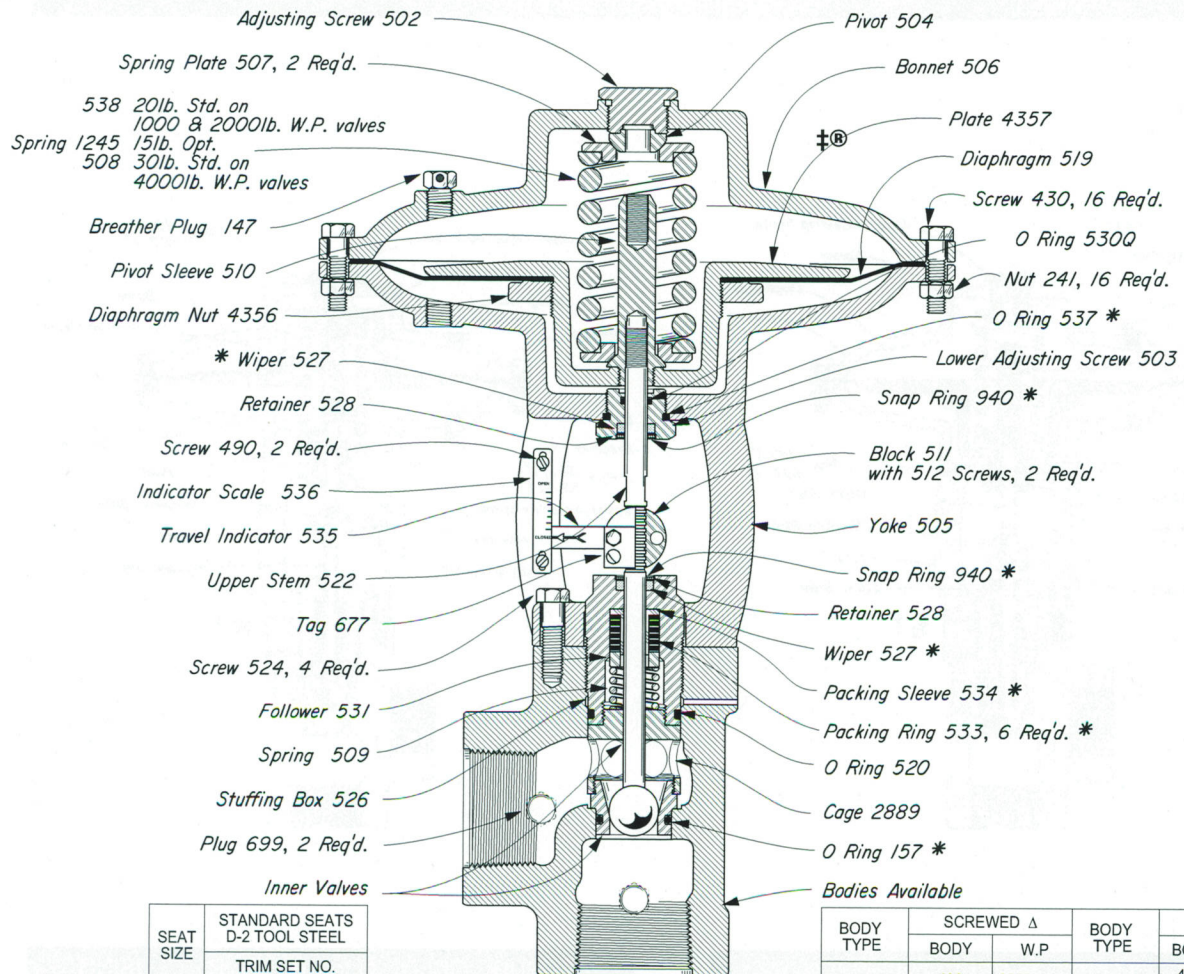

SEAT SIZE	STANDARD SEATS D-2 TOOL STEEL
	TRIM SET NO.
1/4"	T2895
3/8"	T2896
1/2"	T2897
3/4"	T2898†
1"	T2899†

Seat Removal Tool 3033
(Available at extra cost)

†CHROME ALLOY BALL ON STEM
(All other stems use corbide balls)

BODY TYPE	SCREWED Δ		BODY TYPE	FLANGED	
	BODY	W.P.		BODY	ANSI CLASS
THRU	493	2000 psig	THRU	4510	150 RF
	494	4000 psig		4511	300 RTJ
ANGLE	496	2000 psig		4512	300 RF
	497	4000 psig		4513	600 RF
				4514	600 RTJ
				4515	1500 RTJ
				4516	1500 RF

Δ 2" NPT ANSI THREADS

THRU VALVES AVAILABLE:

CAT. NO.	INNER VALVE	VALVE	MAX W.P.	KIT
ECN	1/2"	2200 SMT PO 1/2 IV	2000	RFE
ECO	3/4"	2200 SMT PO 3/4 IV	2000	RFE
ECP	1"	2200 SMT PO 1 IV	2000	RFE
ECR	1/2"	2400 SMT PO 1/2 IV	4000	RFE
ECS	3/4"	2400 SMT PO 3/4 IV	4000	RFE
ECT	1"	2400 SMT PO 1 IV	4000	RFE

ANGLE VALVES AVAILABLE:

CAT. NO.	INNER VALVE	VALVE	MAX W.P.	KIT
ECK	1/2"	2200 SMA PO 1/2 IV	2000	RFE
ECL	3/4"	2200 SMA PO 3/4 IV	2000	RFE
ECM	1"	2200 SMA PO 1 IV	2000	RFE
ETB	1/2"	2400 SMA PO 1/2 IV	4000	RFE
ECQ	3/4"	2400 SMA PO 3/4 IV	4000	RFE
ECU	1"	2400 SMA PO 1 IV	4000	RFE

NOTE: All standard HPMV's have a Cat No. Seats, stems, cages, stuffing boxes and valve bodies are available in 316 stainless steel. Inner valves can be made from a wide selection of materials. Specify when ordering.

Flanged bodies are available. Specify when ordering. For dimensions refer to Table of Contents. Flanged dimensions available on request.

*These are recommended spare parts and are stocked as repair kits.

-20° to 500°F Temperature Range